

AURIGA DUAL PORT 7/22KW PEDESTAL CHARGER




- Designed and manufactured in Melbourne
- Charges one or two ports at up to 22kW on each port simultaneously
- Auto illuminated for night safety
- OCPP compliant with data & usage reporting available
- Over-the-air (OTA) software upgrades
- Level 2 charger with universal connectivity
- Compatible with all EVs, PHEVs & e-bikes
- Modular build for longer life
- Flat surface area for branding & instructions
- Robust, reliable & designed for Australian weather conditions
- 2 year warranty
- Fast & easy installation, no pedestal required
- Site/Driver Support and EV Maintenance packages available

COMPATIBLE WITH UPCHARGE BY



- Paid charging - by hour or kWh
- Whitelisting capability
- Manage charging sessions remotely
- Load management
- Easy to use interface
- Ideal for fleet

**Earn up to \$500 per
month, per port**

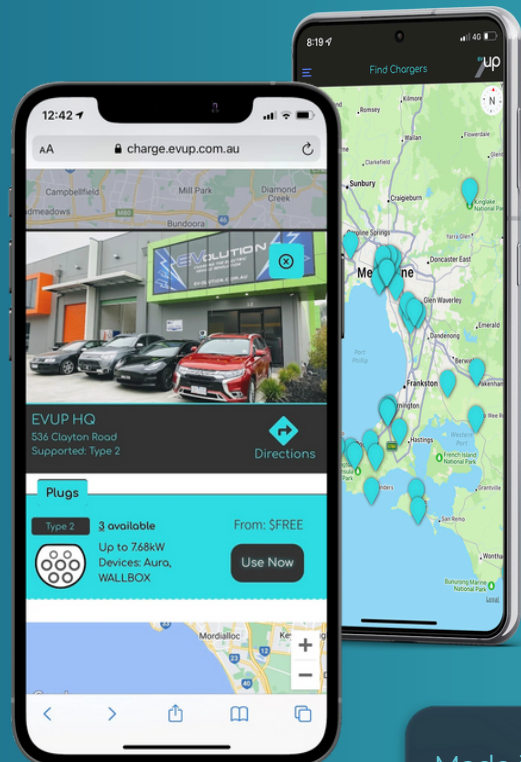

Made in
Melbourne with
love by EVup ❤️



To find out more or
place an order:

1300 388 700
charge@evup.com.au

www.evup.com.au

AURIGA DUAL PORT 7/22KW PEDESTAL CHARGER SPECIFICATIONS



	Model	7kW	22kW
AC Input	Input Rating	230Vac ± 10%	400Vac ± 10%
	AC Input Connection	L + N + PE,	3P + N + PE, Wye connection
	Max. Input Current	32 A	32 A
	Frequency	50 Hz	50 Hz
	Power Factor	>0.99 @ full load	>0.99 @ full load
AC Output	Efficiency	95%	95%
	Output Voltage Range	220-250VAC,	430-480VAC
	Max. Output Power	7kW	7/22 kW
	Max. Output Current	32A @ 400V	32A @ 400V
User Interface	Push Buttons	Emergency Stop	Emergency Stop
	Interface	USB, RJ45, 2.4 Ghz	USB, RJ45, 2.4Ghz
Packing	Dimension	1130H x 240W x 240D	1130H x 240W x 240D
	Weight	25kg	25kg
Environmental	Operating Temperature	-25°C ~ + 45°C, power derating from + 50°C and above	-25°C ~ + 45°C, power derating from + 50°C and above
	Humidity	5% ~ 90% RH, non-condensing	5% ~ 90% RH, non-condensing
	Altitude	2000m	2000m
	IP Level	IP67/ IK10	IP67/ IK10
Mechanical	Cable Length	None/Untethered	None/Untethered
Regulation	Regulation	IEC 62196-2, IEC 61851-22,	IEC 62196-2, IEC 61851-22,
	Compliance	RCM 6mA	RCM 6mA
	Protection	Over/under voltage, over current, over temperature, ground fault	Over/under voltage, over current, over temperature, ground fault